

Continuous System  
with Spread Mullion Capability

**THERMA TRU**<sup>®</sup>  
DOORS

2-Minute Tru-Facts | Continuous System



- Size is no limit.




Fit more replacement openings. Deliver the clean sight lines homeowners desire. This solution offers flexibility and aesthetics to meet the needs of the repair and remodel market.

**Available February 2, 2015**

Top: Fiber-Classic Mahogany Collection, Chord Glass with SDLs, Door – FCM608XC,  
Sidelites – FCM6126XCSL, Dentil Shelf  
Bottom: Composite Adjustable Sill with Mill Approach, Lightwood Cap

## Continuous System with Spread Mullion Capability

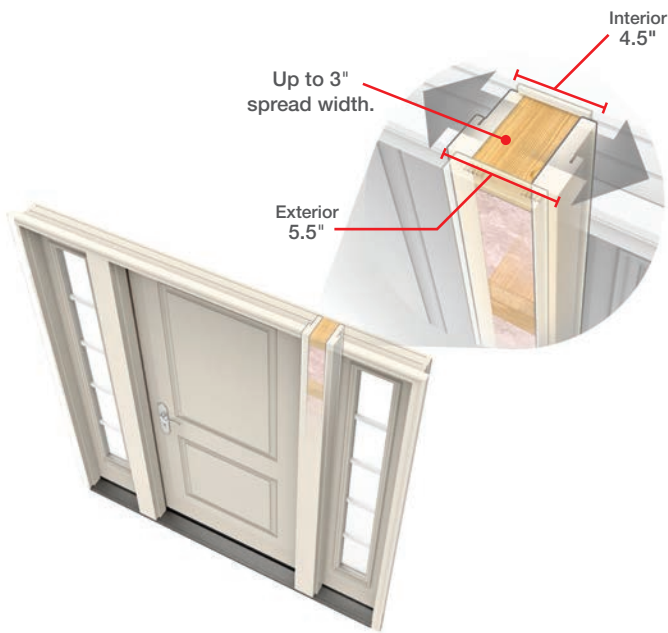

## Inswing Composite Adjustable Sill



**NEW Continuous Length:**  
14"-3'0"-14" with 3" Spread per Mullion

Depths:	Sill Finishes:	Cap Colors:
4- <sup>9</sup> / <sub>16</sub> "	Mill	Lightwood
5- <sup>3</sup> / <sub>4</sub> "	Bronze	Darkwood
7- <sup>3</sup> / <sub>4</sub> "	Brass	
	Satin Nickel	

Ask your Therma-Tru seller about continuous head jamb options made to our specifications to complete the system.

\*See the Therma-Tru 2015 *Architectural Details & Components* manual for actual unit size specifications.

\*\*Composite adjustable sill included in the limited warranty when installed in a Therma-Tru fiberglass or steel door system, and Tru-Defense eligible when properly assembled and installed in a Therma-Tru fiberglass door system with all Therma-Tru specified system components in accordance with the Rider.

Note: See your Therma-Tru seller or visit [www.thermatru.com](http://www.thermatru.com) for details on available product sizes and options, Tru-Defense Rider, and limited warranties and exclusions.

1-800-THERMA-TRU (843-7628) [www.thermatru.com](http://www.thermatru.com)  
1750 Indian Wood Circle, Maumee, OH 43537

## Tru-Advantages

### ■ Fits more replacement openings with spread mullion capability to fill 49"-75" rough openings\*.

- Builds single door systems with 10", 12" or 14" sidelites and spreads up to 3" in 1/4" increments per mullion.
- Offers a total of up to 6" of added width flexibility in a single door system with two sidelites.
- Fills retrofit openings with odd sizes seamlessly – convert double doors to a door with two sidelites or replace odd-sized wood doors or direct-set sidelites.

### ■ Delivers the clean sight lines desired by replacement customers.

- Offers a seamless look with the continuous sill and head extending the full width of the system.
- Covers the space left after removing an old door with the spread instead of hiding it with trim build-ups.
- Produces a sturdy appearance with the continuous sill and head combined with the width of the spread mullions.

### ■ Provides storm door- and cladding-friendly replacement options.

- Makes storm door-ready units without an adapter by creating mullions the same depth as the jambs.
- The more robust platform delivers great-looking results with coil cladding.

### ■ Makes it more convenient to specify and install entry doors.

- Most units can be made to fit 49"-75" openings\* with the flexibility of spread mullions.
- Helps provide stability to support consistent, square installation with continuous sill and head.
- Consistent screw placement with a standard active cap simplifies providing replacement sill caps.



Fiberglass\*\*



Profiles™ & Pulse Steel\*\*



Traditions Steel\*\*



Tru-Defense Eligible\*\*